



Gate valve rilsan coated (nylon 11) Type 133 PN 6 and PN 16



Version 0116

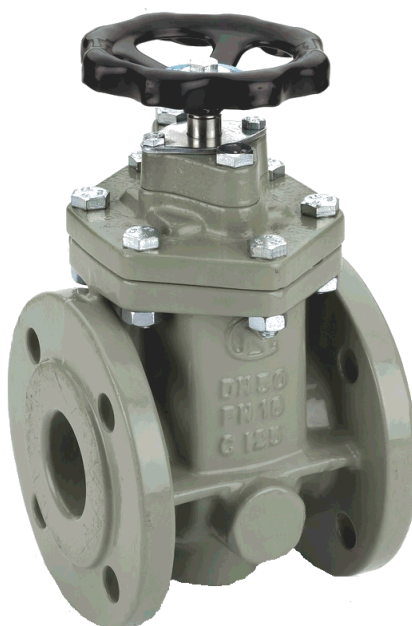

Gate valve Type 133

Application:

Designed for use in cold and hot water supply systems, softening plants, desalination works, distilling works, coolant plants (fresh and salt water) and swimming pools

Test:

JCH's 100% test

Additional parts:


all type of spareparts

Material

Handwheel:	32 -150mm sheet iron 200mm cast iron
Top plate:	Galvanized steel
U-packing:	EPDM Rubber
O-rings:	EPDM Rubber
Top flanges :	Cast iron GG25
Fibrepacking:	Asbestos free
Bonnet:	Cast iron GG25 with EPDM rubber gaskets
Stem:	Stainless AISI303
Wedge:	Cast iron GG25
Drain plug:	DZF brass CW602N
Body:	Cast iron GG25



Gate valve rilsan coated (nylon 11)

Type 133 PN 6 and PN 16



Version 0116

Face to face: BS5150, Table 2, line 5.
 Flanges: drilled to BS4504: part 1, PN 6, table 6/11, PN16 table 16/11
 Working temperature: 70° C max. temperature 80° C
 Working pressure: 6 bar, totalpressure: 16 bar, test pressure: 16 bar.

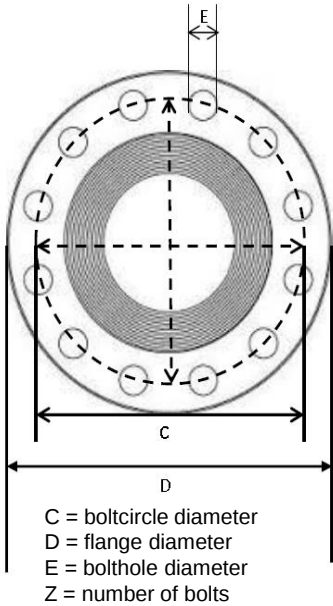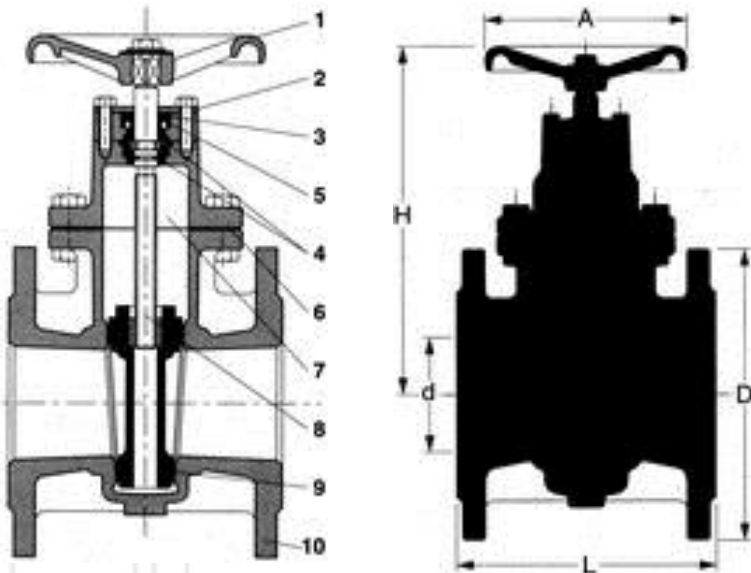

Components:

- 1.Handwheel

2.Top plate

3.U-packing

4.O-rings

5.Top flanges
- 6.Fibrepacking

7.Bonnet

8.Stem

9.Wedge with sealings

10.Drain plug
- 11.Body

Order no..	PN	DN=d	D mm	L mm	H mm	A mm	C mm	E mm	Z	weight Kg
410515-010	16	32	140	140	195	120	100	18	4	10
410515-011	16	40	150	140	195	120	110	18	4	11
410515-012	16	50	165	150	195	120	125	18	4	12
410515-013	16	65	185	170	220	120	145	18	4	15
410515-014	16	80	200	180	247	140	160	18	8	20
410515-016	16	100	220	190	277	160	180	18	8	25
410515-017	16	125	250	200	305	160	210	18	8	32
410515-018	16	150	285	210	400	200	240	23	8	49
410515-020	16	200	340	230	485	225	270	23	12	77
410516-010	6	32	120	140	195	120	90	14	4	9
410516-011	6	40	130	140	195	120	100	14	4	9
410516-012	6	50	140	150	195	120	110	14	4	10
410516-013	6	65	160	170	220	120	130	14	4	12
410516-014	6	80	190	180	247	140	150	18	4	16
410516-016	6	100	210	190	277	160	170	18	4	20
410516-017	6	125	240	200	305	160	200	18	8	26
410516-018	6	150	265	210	400	200	225	18	8	40

JCH A/S

Karetmagervej 21 DK-7100 Vejle Tel. +45 75 85 84 08 Fax +45 75 85 80 82
 CVR-nr. 87 56 20 18 | CVR-nr. DK 15 30 02 72