


JCH tapping saddle with ball valve type 343 – 096

for PE and PVC pipe systems



Version 0113



Characteristics:

Ductile iron tapping saddle for PE and PVC pipe system with ball valve.

Suitable for drilling under pressure.

Composition of the finest and best material for the ball valve and many years of experience have shown that the valve can operate even after many years "in the ground".

The ball valve is prepared for AVK extension spindle and street cover.

Outlet: PRK compression joints.

Application:

Drinking water and sewage

Maximum working temperature: 70 °C

Test:

JCH 100% test

Accessories:

AVK extension spindles fixed length serie 04/05


AVK extension spindles telescopic serie 04/07

AVK street cover


Material

Tapping saddle:	
Body:	Ductile iron GJS-500-7 (GGG-50)
Coating:	Epoxy coating according to DIN 30677-2
Gasket:	EPDM
Liner:	SBR
Bolts:	Stainless steel AISI 321
Nuts:	Stainless steel AISI 316
Ball valve:	
Body:	DZR Brass CW602N
Spindle:	Stainless steel AISI 303
Spindle gasket:	SEDI PTFE + O-ring of NBR rubber
Ball:	Stainless steel AISI 316
Ball seat:	SEDI PTFE

JCH tapping saddle with ball valve type 343-096 for PE and PVC pipe systems



Version 0113

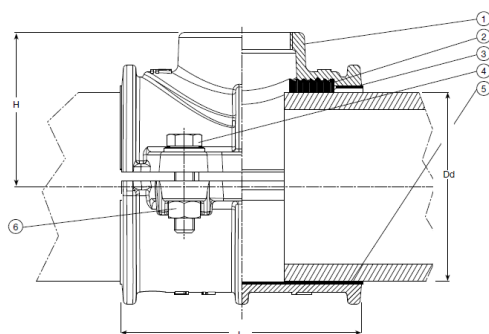

Component list

1. Saddle upper part	5. Saddle lower part
2. Gasket	6. Nut
3. Rubber liner	Ball valve: See datasheet
4. Bolt	

vvs nr.	Order no.	Dim.	DN/mm	Dd/mm	PRK/mm	L/mm	H/mm	H w/valve/mm	weight
063405-061	343-096-0001	63x32	50	63	32	100	58	173	2,80
063406-061	343-096-0002	63x40	50	63	40	100	58	188	3,40
063405-072	343-096-0003	75x32	65	75	32	120	75	190	3,30
063406-072	343-096-0004	75x40	65	75	40	120	75	205	3,90
063405-086	343-096-0005	90x32	80	90	32	120	77	192	3,80
063406-086	343-096-0006	90x40	80	90	40	120	77	207	4,30
063405-105	343-096-0007	110x32	100	110	32	140	88	203	4,70
063406-105	343-096-0008	110x40	100	110	40	140	88	218	5,20
063405-119	343-096-0009	125x32	125	125	32	140	96	211	4,80
063406-119	343-096-0010	125x40	125	125	40	140	96	226	5,30
063405-133	343-096-0011	140x32	125	140	32	170	104	219	6,50
063406-133	343-096-0012	140x40	125	140	40	170	104	234	7,00
063405-152	343-096-0013	160x32	150	160	32	170	113	228	7,00
063406-152	343-096-0014	160x40	150	160	40	170	113	243	7,50
063405-190	343-096-0017	200x32	200	200	32	200	133	248	11,20
063406-190	343-096-0018	200x40	200	200	40	200	133	263	11,60
063405-214	343-096-0019	225x32	200	225	32	200	146	261	11,30
063406-214	343-096-0020	225x40	200	225	40	200	146	276	11,80
063405-238	343-096-0021	250x32	250	250	32	140	158	273	12,30
063406-238	343-096-0022	250x40	250	250	40	140	158	288	12,80
063405-267	343-096-0023	280x32	250	280	32	140	173	288	5,50
063406-267	343-096-0024	280x40	250	280	40	140	173	303	6,00
063405-301	343-096-0025	315x32	300	315	32	140	191	306	5,70
063406-301	343-096-0026	315x40	300	315	40	140	191	321	6,20

JCH ApS

Karetmagervej 21 DK-7100 Vejle Tel. +45 75 85 84 08 Fax +45 75 85 80 82
CVR-nr. 87 56 20 18 | CVR-nr. DK 15 30 02 72