


JCH ball valve Type 745513

with female threads.
Full bore. VA and SITAC approved



Version 0116



JCH ball valve with female threads:

Application:
Service valve for water supply.
Suitable for drilling under pressure

Test:
JCH 100% test

Accessories:
Installation units: No.: 145221-000 and No.: 145223-000
The installation units can be ordered in two different sizes:
900-1500mm and 1100-1900mm


Material

Body:	DZR Brass CW625N
Spindle:	Stainless steel - AISI 303
Spindle-gasket:	SEDI PTFE + O-rings of NBR rubber
Ball:	stainless acid proof steel - AISI 316
Top gasket:	NBR O-rings
Top union:	DZR Brass CW602N
Gasket inside:	SEDI PTFE




JCH ball valve Type 745513

With 16mm # operating key



Version 0116

Ball valve type 7455123 is suitable as service valve for water supply and sewage.
 The valve can be used for drilling under pressure because of the full bore version.
 The valve is quick and easy to install and use.
 The valve is made of the finest and best materials.

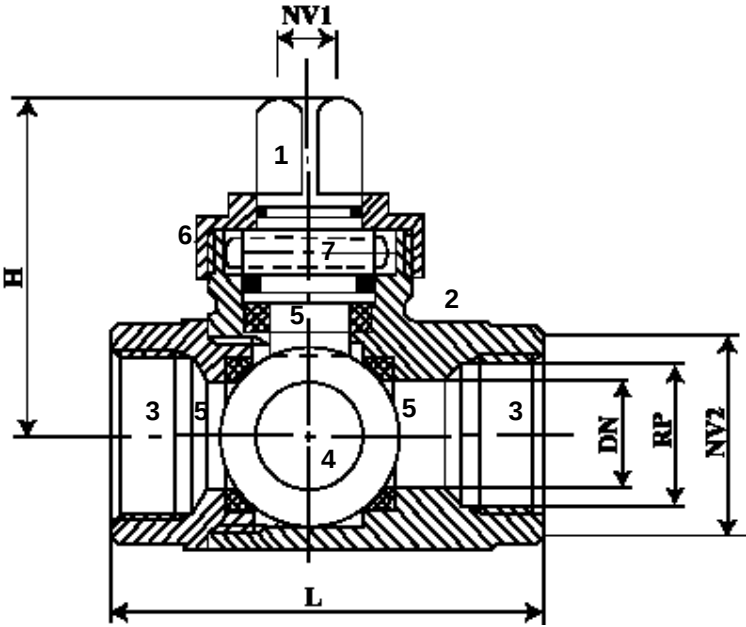

components

- 1. Spindle
- 2. Body
- 3. connector
- 4. ball
- 5. SEDI PTFE gaskets

- 6. Union nuts
- 7. NBR O-rings

Order no.	LNS no.	RP	DN mm	L mm	H mm	NV1 mm	NV2 mm	weightt kg
745513-006	343-020-20-00	¾"	20	79	61	16	39	0,8
745513-008	343-025-20-00	1"	25	82	66	16	42	1,0
745513-010	343-032-20-00	1¼"	32	103	71	16	56	1,7
745513-011	343-040-20-00	1½"	40	107	81	16	70	2,5
745513-012	343-050-20-00	2"	50	120	89	16	70	3,3

JCH A/S

Karetmagervej 21 DK-7100 Vejle Tel. +45 75 85 84 08 Fax +45 75 85 80 82
 CVR-nr. 87 56 20 18 | CVR-nr. DK 15 30 02 72