


Clamped T-connectors / speedfix Type 6441 – 43



Version 0216



Clamped T-connectors Type 6441 - 43

Application:
for mounting on new and older installations of low-flush lavatories wash basins kitchen sinks, washing machines, automatic dishwashers, and for mounting and extension of compressed air plants and sprinkler systems
avoid cuttings, threadings, long screws and tee-pieces.
Applicable for iron and copper tubes

Test:
JCH's 100% test


Additional parts:
gasket, drills and drilling sockets.
Reduction adapters makes 013762-004 fits smaller dimensions CU pipes

Material


Top:	DZR brass CW625
Lower part:	DZR brass CW625
washers:	EPDM temperature -30°C/+130°C
Screws:	Electroplated with Unbacho head
Drill:	HS twist drill

Clamped T- connectors / speedfix Type 6441 – 43

Speed fix made of DZR brass, to make an extra outlet fast and easy

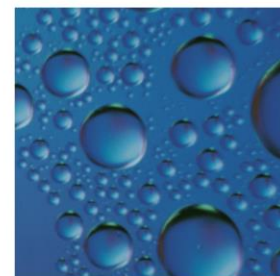

Version 0216

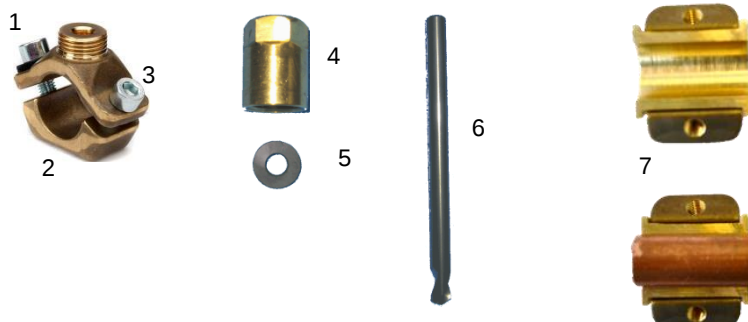

Components:

- 1.Top
- 2.Lower part
- 3.Screws
- 4.Drilling sockets
- 5.Gasket
- 6.HS Twist drill
- 7.Reduction adapter

Mounting advise all dimensions		Mounting torque	
picture	connection	Min. Nm	Max. Nm
	CU-pipe	5	7
	Iron- pipe	7	12

Order no..	Dimension	CU pipe	Iron pipe	Pce. Each box.	item	weight Kg
013762-104	½"/22mmCU	✓	✓	10	speedfix	0,170
013762-106	¾"/28mmCU	✓	✓	5	speedfix	0,258
013762-108	1"/35mm CU	✓	✓	5	speedfix	0,285
013762-111	1 ½"/48mm	-	✓	5		
013756-004	8 x 115mm	✓	✓		HS twist drill	0,044
013767-004	½" RG			10	Drilling sockets	0,098
013768-004		✓	✓		Gasket	
Adapters For 013762-004	for 013762-104					
013762-003	15mm CU	✓	-	10	reduction	

JCH A/S

Karetmagervej 21 DK-7100 Vejle Tel. +45 75 85 84 08
CVR-nr. 87 56 20 18 | CVR-nr. DK 15 30 02 72